





- Adopts High-Functional Brushless Motor, marvelous lifespan and strong durability to repair and maintenance almost needless.
- Smaller size, light weight, low noise-pollution, fashionable design, high stability and easy operation motor which gives the benefit of longer working-time. (3 years warranty on motor)
- Brushless Motor has more stable torque output : It is best to fit for operating in clean-room circumstance and no worry of pollution will be arisen.
- Best tool to assemble Watch, Laptop, Digital Camera, DVD Player, Cell Phone, Communication Equipment and High tech Products which need to be assembled in clean-room.
- CE and ETL are optional

### External Dimension

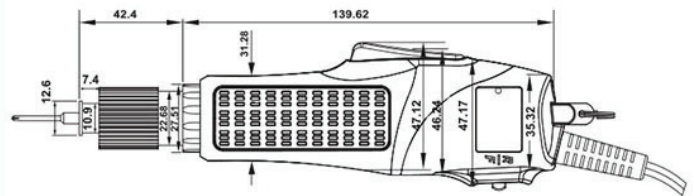


SKD-BN200L

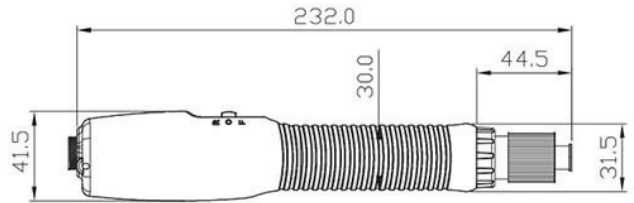

SKD-BN200P

### Torque Range Chart

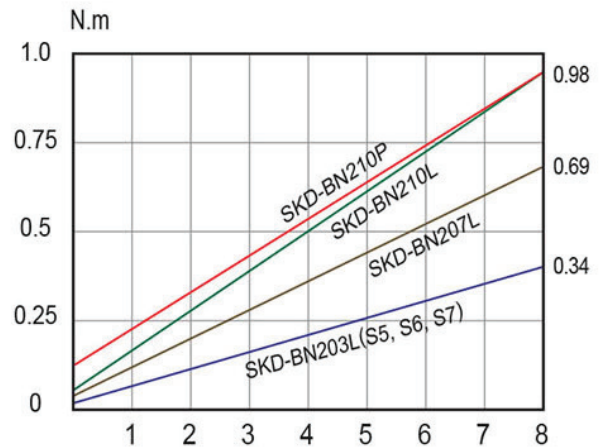

### Specifications

Model		SKD-BN203L	SKD-BN203LS5	SKD-BN203LS6	SKD-BN203LS7	SKD-BN207L	SKD-BN210L/P
Input Voltage		DC24V or DC32V					
Power Consumption		25W					
Torque	(kgf.cm)	0.2~3.5	0.2~3.5	0.2~3.5	0.2~3.5	0.5~7	L: 1~10 / P: 2~10
	(Lbf.in)	0.18~3.01	0.18~3.01	0.18~3.01	0.18~3.01	0.44~6.10	L: 0.89~8.67 / P: 1.77~8.67
	(N.m)	0.02~0.34	0.02~0.34	0.02~0.34	0.02~0.34	0.05~0.69	L: 0.10~0.98 / P: 0.2~0.98
Repeatable Torque Accuracy(%)		±3%					
Torque Adjustment		Stepless					
Free Speed (r.p.m)	HI	1000	500	370	230	1000	1000
	LO	700	350	260	160	700	700
Screw Size Dia (mm)	Machine Screw	1.0~2.3	1.0~2.3	1.0~2.3	1.0~2.3	1.4~2.6	1.6~3.0
	Tapping Screw	1.0~2.0	1.0~2.0	1.0~2.0	1.0~2.0	1.4~2.3	1.6~2.6
Weight(g)		L:330 P:310					
Length(mm)		L:185 P:230					
ESD(Anti-Static)		✓ (with black housing)					
CE		✓					
RoHS		✓					
Bit Type							

### Accessories

**Torque Fixing Ring KC-13C**

**Torque Adjuster KW-4**

**Suspension Rack KH-5**

**Spring Balancer KL-600**

**Power Controller SKP-32BC-60W**

\*SKD-BN203LS5 can not work with KL-SSBN slow start control module