


## R13R-5030HA-4M-7075

Stamped Aluminium Blades with guard grill for short inlet

Ordering code: 0313-4-1081


Operating Point		Nominal data		Erp Data	
Air flow [m3/h]	6828	Phase [~]	1	Overall efficiency [%]	29.4
Static pressure [Pa]	121	Voltage [V]	230	Measurement cat.	A
Density [kg/m3]	1.2	Voltage range [V]	N / A	Efficiency category	static
Total pressure [Pa]	177	Frequency [Hz]	50	Efficiency grade N	36.4
Rotation speed [1/min]	1331	Input power [W]	780	Variable speed drive	NO
Input power [W]	777	Input current [A]	3.5	Power input [kW]	0.77
Current [A]	3.51	Nominal speed [rpm]	1370	Airflow [m3/h]	6828
Total efficiency [%]	43	Min. ambient temp. [°C]	-30	Pressure drop [Pa]	124
Static efficiency [%]	30	Max. ambient temp. [°C]	60	Rotational Speed [rpm]	1336
Sound power Outlet [dB]	0	Protection class	IP54	Specific ratio	1.00
Weighted sound power Outlet [dB(A)]	0	Insulation class	155		
Sound power inlet [dB]	0	Capacitor [µF/450V]	16.00		
Weighted sound power inlet [dB(A)]	0	K. Value	N / A		
Sound pressure [dB]	0	Connection	N / A		
Weighted sound pressure [dB(A)]	0	Weight [Kg]	13.1		

Static pressure

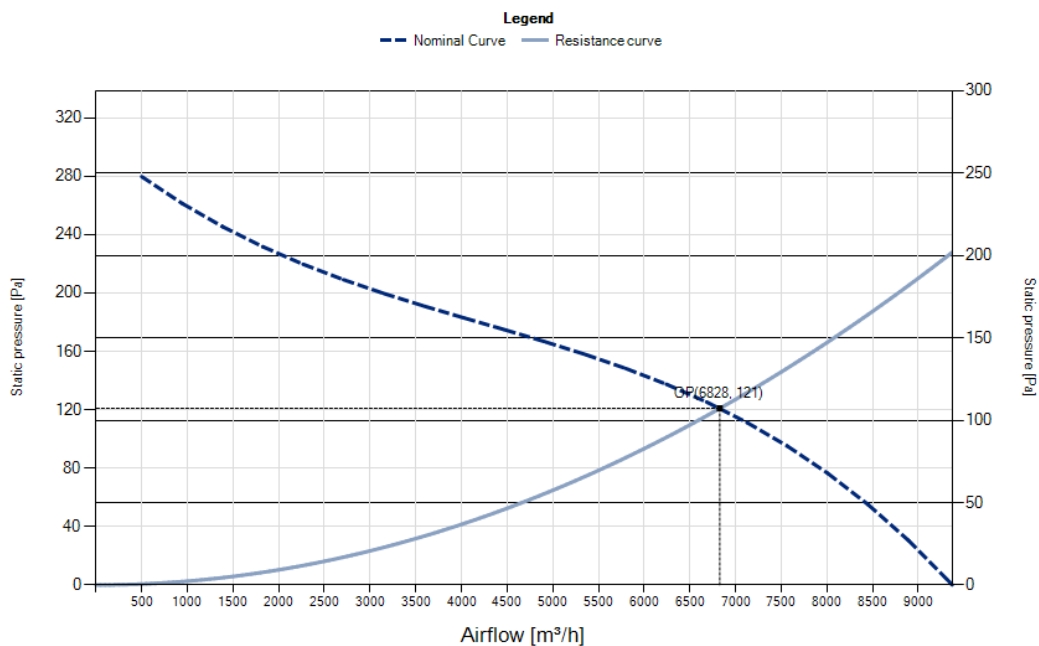


Measured in full bell mouth without guard grill. Installation category A according to ISO 5801.



### Total pressure

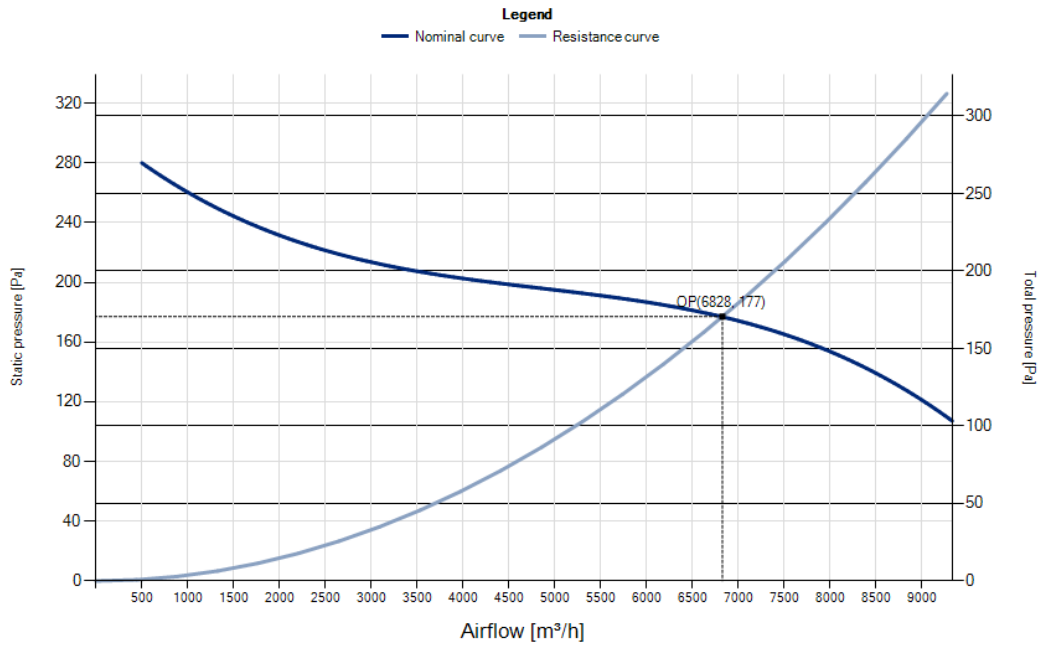


Measured in full bell mouth without guard grill. Installation category A according to ISO 5801.

### Input power

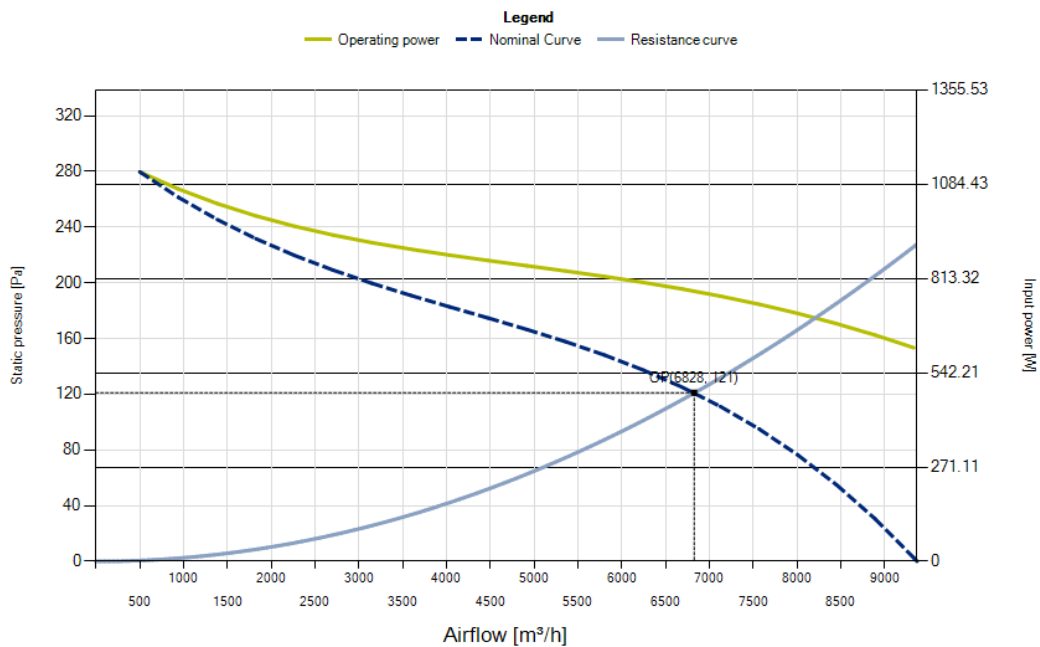


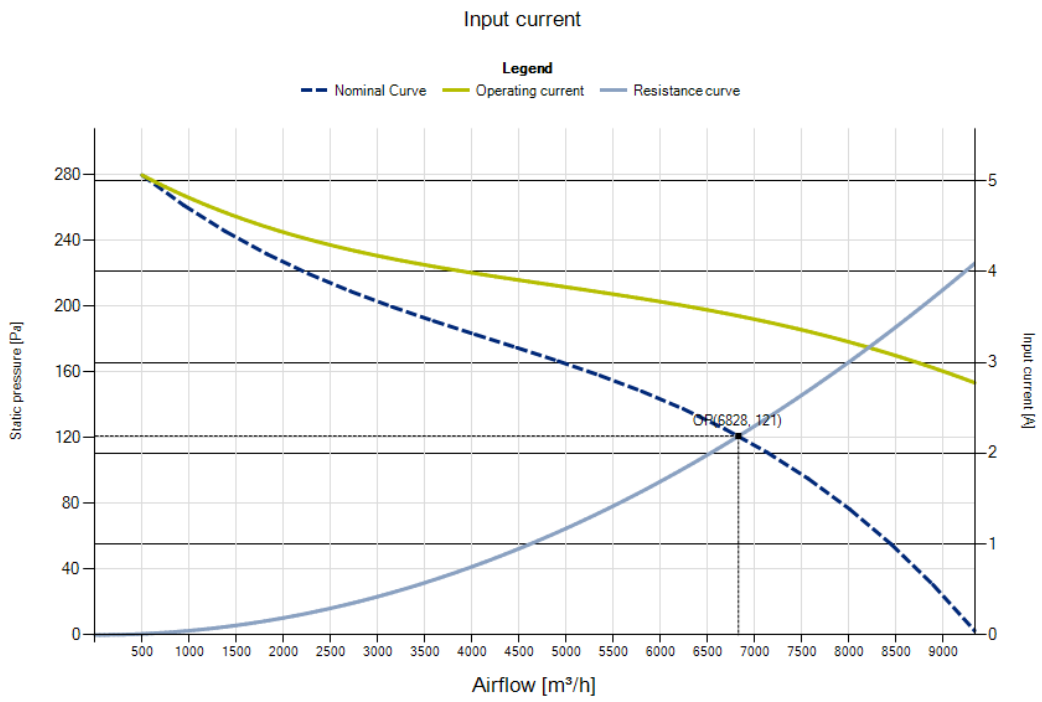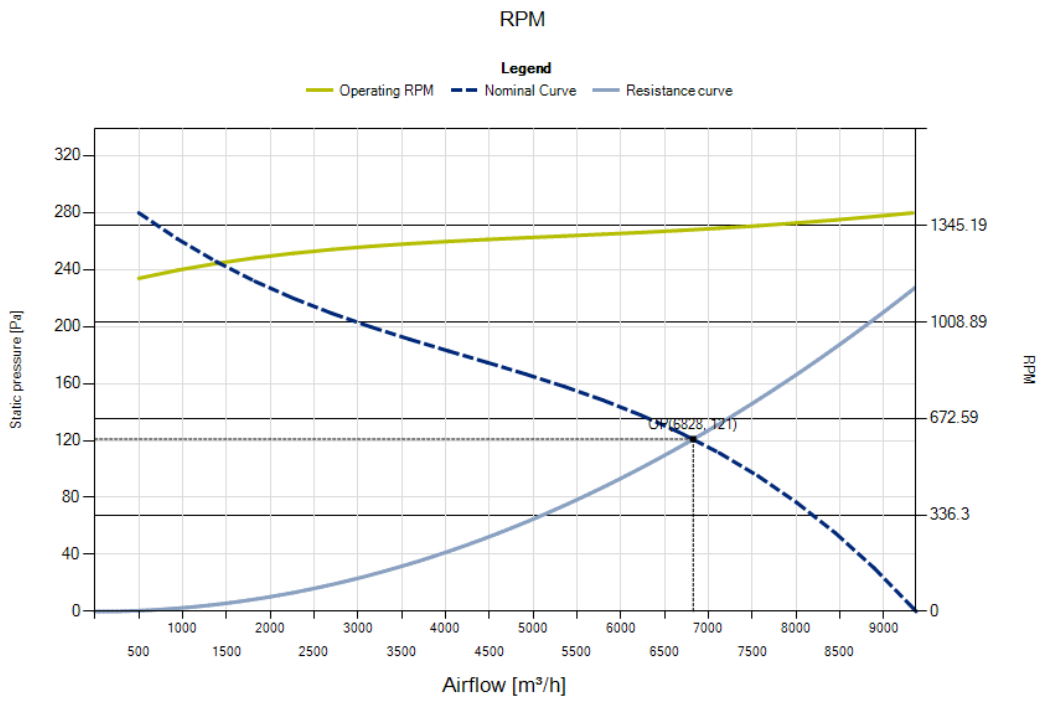


### Specific fan power

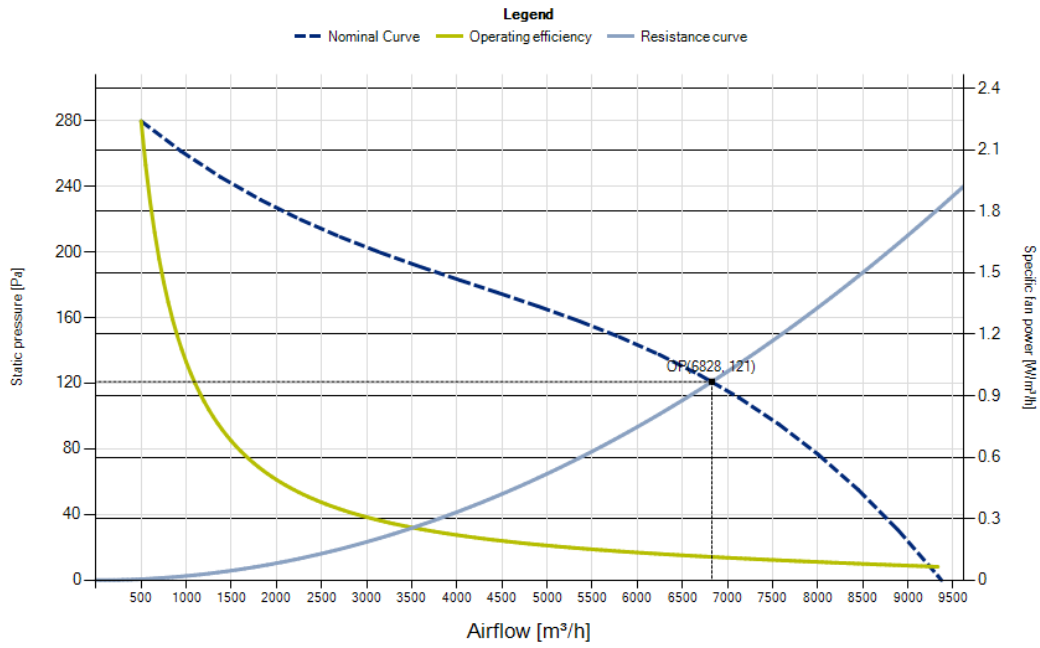

### Overall static efficiency

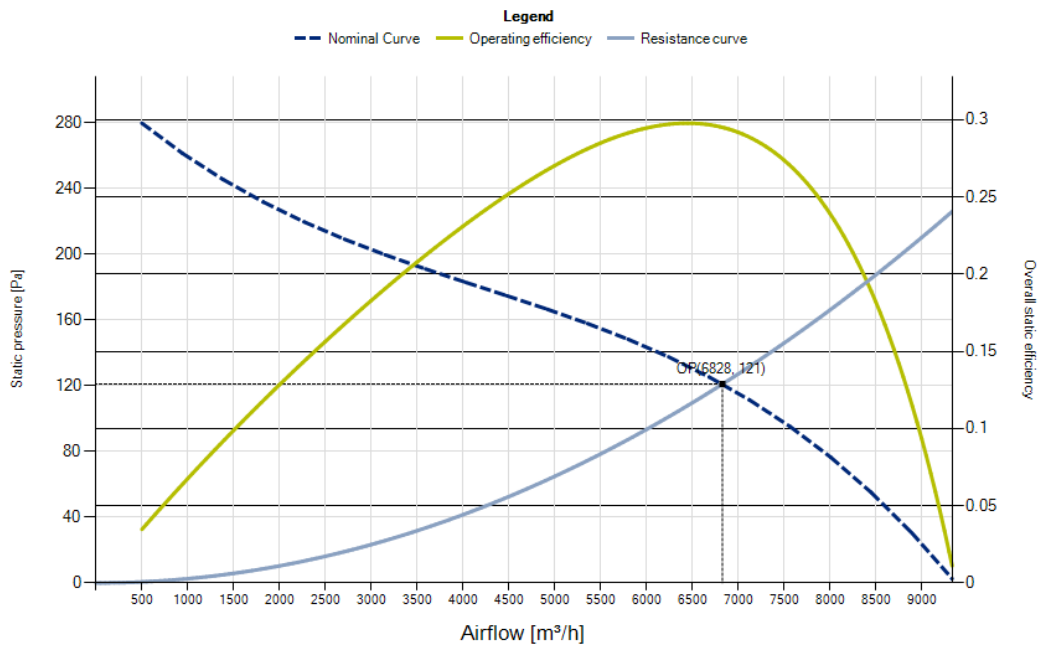

### Total efficiency

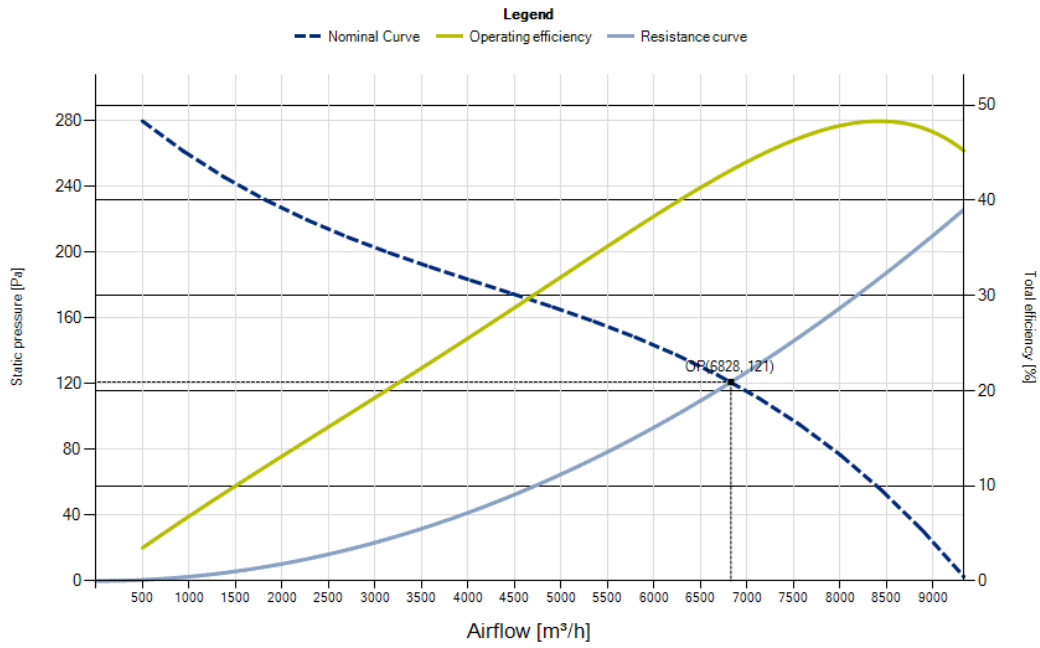

### Static efficiency

