


direct operated solenoid valves

coil 31 mm

general information	
ambient temperature	- 10°C to + 50°C
response time	6 - 18 ms
mounting	in any position
standard seal materials*	NBR, FPM, EPDM, FFKM
dimensions	see page 2/2
coil data	see page 2/2
connector data	see page 2/2

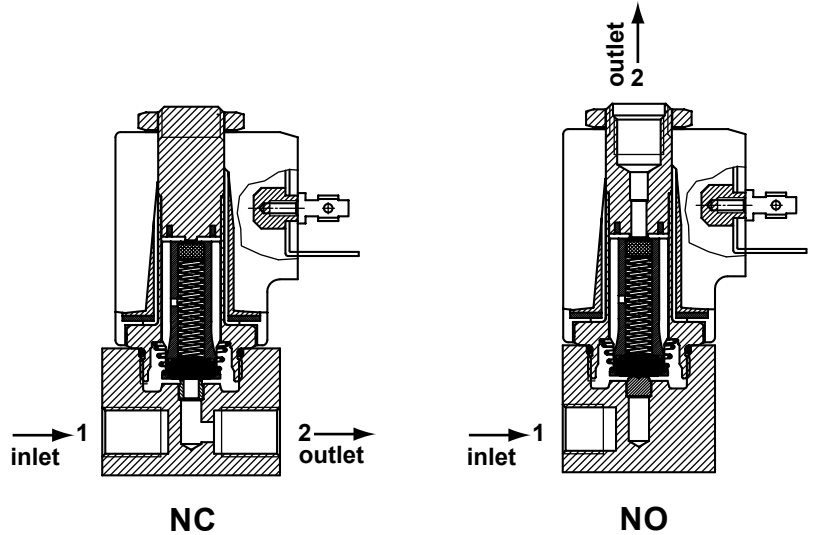

\* other seal materials on request

function	symbol	orif. mm	*Kv	pressure range (bar)			nominal power			TABLE A	
				min.	max. DC	max. AC	Watt DC	V.A.		main code	
								inr.	hol.	AC	DC
<b>2/2 normally closed (NC)</b> 		0.8	0.5	0	60	80	10	21.5	13.5	<b>Q2C108</b>	<b>Q2C608</b>
		1.2	1.3	0	45	70	10	21.5	13.5	<b>Q2C112</b>	<b>Q2C612</b>
		1.6	1.7	0	35	60	10	21.5	13.5	<b>Q2C116</b>	<b>Q2C616</b>
		2.4	3.5	0	15	30	10	21.5	13.5	<b>Q2C124</b>	<b>Q2C624</b>
		3.0	4.5	0	10	18	10	21.5	13.5	<b>Q2C130</b>	<b>Q2C630</b>
		4.0	7.5	0	3	8	10	21.5	13.5	<b>Q2C140</b>	<b>Q2C640</b>
	6.0	12.0	0	0.7	2.5	10	21.5	13.5	<b>Q2C160</b>	<b>Q2C660</b>	
<b>2/2 normally open (NO)</b> 		0.8	0.5	0	40	40	10	21.5	13.5	<b>Q2C208</b>	<b>Q2C708</b>
		1.2	1.1	0	35	35	10	21.5	13.5	<b>Q2C212</b>	<b>Q2C712</b>
		1.6	1.4	0	20	20	10	21.5	13.5	<b>Q2C216</b>	<b>Q2C716</b>
		2.4	3.0	0	10	10	10	21.5	13.5	<b>Q2C224</b>	<b>Q2C724</b>
		3.0	3.5	0	8	8	10	21.5	13.5	<b>Q2C230</b>	<b>Q2C730</b>

\*l/min. of water with ΔP of 1 bar



**order code**    Q 2 C . . . . . 6 . . .

<b>main code</b> see table A on this page	<b>stem</b>		<b>seals</b>		<b>manual override</b>		<b>coil code</b> see table B on page 2/2
	<b>code</b> B D E	<b>material</b> stainless AISI 303 brass with chem. nickel treated brass	<b>code</b> B V E K	<b>material</b> NBR FPM EPDM FFKM	<b>code</b> 0 1 2 3	<b>type</b> none brass screw palm button push button	



direct operated solenoid valves

coil 31 mm

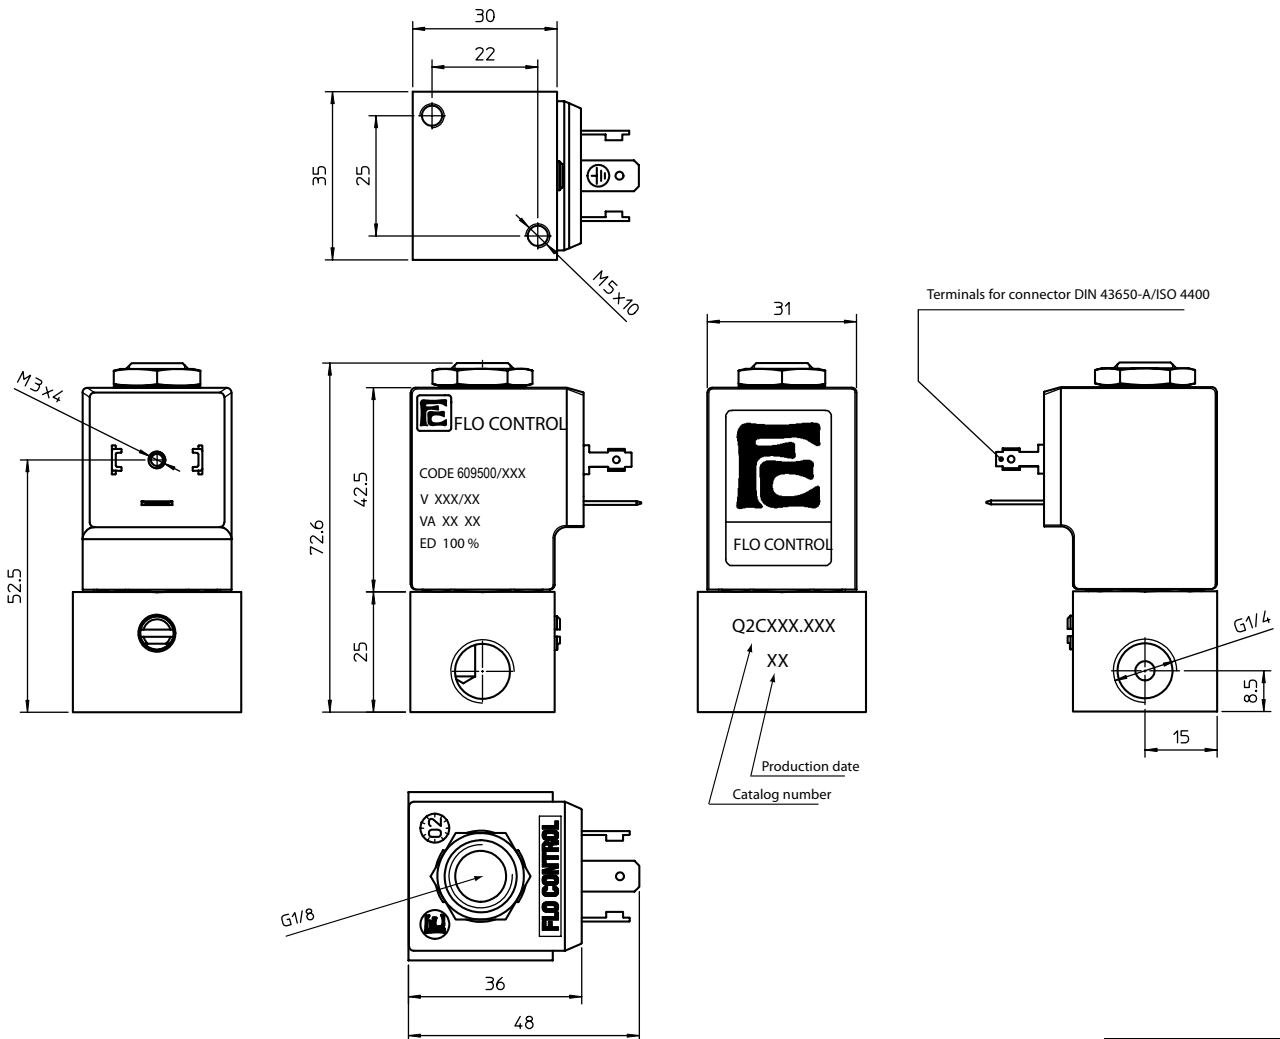

<b>weight</b>	330 g
---------------	-------

coil code	TABLE B			
	*voltages	code		
		~ 50 Hz	~ 60 Hz	= DC
	12	-	-	666
	24	611	644	671
	48	616	-	676
	110	621	-	681
	115	-	653	-
	220	631	-	-
	230	638	659	-
	380	640	-	-

coil specification	
wire insulation	class H180° C
encapsulation	class F155° C
encapsulation mat.	nylon
energising duration	100% at +20° C ambient
voltage tolerance	- 10% +15% of nominal voltage
*power consumption	AC 13,5 VA - DC 10 Watt
electrical connection	DIN 43650/A (2P+ earth)
cable connection	Pg 9 (for cable dia. 6-8mm)
protection class	IP 65 (with connector )

\* other voltages and wattages on request

connector (not included, must be ordered separately)

<b>code</b>	Z10031
-------------	--------

**FLO CONTROL**  
Solenoid Valves

