

Compact Pressure Switches

KLK/KLM

Piston pressure switch Type KLK

Repeatability ± 1.0 % typical

Diaphragm seal pressure switch Type KLM

Repeatability ± 2.0 % typical

Features

OEM pressure switch series,

Compact design,

Threaded connection

Factory settings only fully tamper proof.

Adjustment ranges

1 ... 400 bar

Applications

Mobile hydraulics,

Motor control,

Hydraulic clamping



Technical Data

Wetted parts:Type KLK / KLM	NBR, PTFE Brass, roller bearing steel (KLK) Stainless steel (KLM)
Repeatability: Type KLK: Type KLM:	± 1 % typical ± 2 % typical
Switching rate:Type KLK:Type KLM:	max. 60/min max. 30/min
Temperature range:Type KLK:Type KLM:	-40 °C... +80 °C -20 °C... +80 °C
Protection class:Silicone cable (K2):Plug connector (S1):	IP67 / IP69K optional IP65
Housing:Type KLK / KLM	Brass and stainless steel


Process connection:	M12 x 1.5 mm male G1/4 male other connections on request
Electrical connection:	Silicone cable (K2) Plug connector (S1)
Electrical ratings capacity and hysteresis:	A large variety of micro switches offers different electrical ratings and hysteresis for many applications.
Weight: Type KLK: Type KLM:	0.2 kg approx. 0.2 kg approx.
Set point adjustment:	Factory set
Intrinsically safe:	A large variety of micro switches offers different electrical ratings and hysteresis for many applications.
Approval:	Exi = Ex ia approval, further approval on request

Pressure Ranges

* Higher operating pressure (up to 150 bar) (with proof pressure 200 bar) on request. Please add to your order!

Pressure range code	Adjustment range [bar]	Proof pressure [bar]	Max. operating pressure [bar]	Max. hysteresis [bar]
	Increasing pressure	short term		end of range
KLM-006	1 ... 6	80 /200*	40*	0.6
KLM-025	5 ... 25	80 /200*	40*	2.6
KLM-040	10 ... 40	80 /200*	40*	3.8
KLK-100	30 ... 100	450	300	15
KLK-300	60 ... 300	450	300	30
KLK-400	150 ... 400	600	400	60

Dimensions (mm / inch)

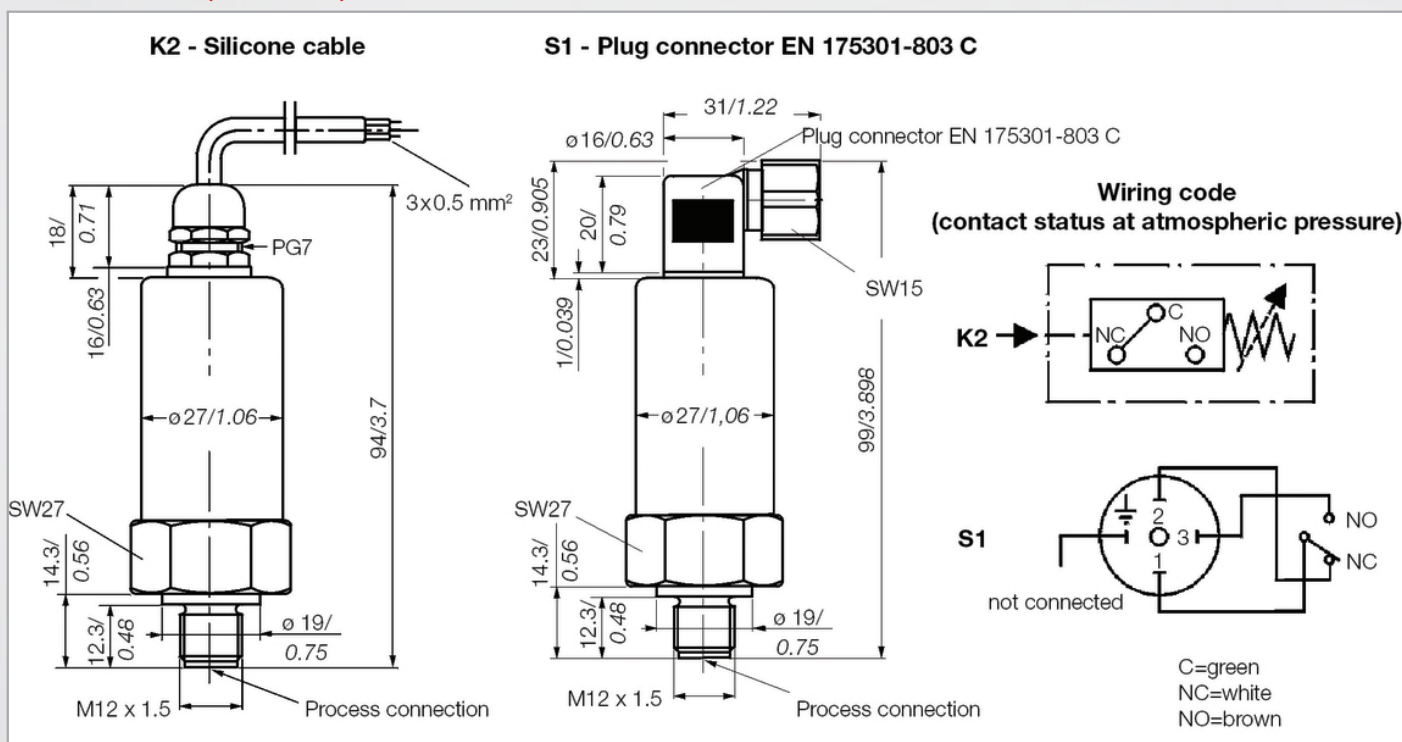

Electrical Ratings

Micro switch	Special features	Volt DC	Ind. Load A	Res. Load A	Comments
1	Micro switch with silver contacts	30	3.0	5.0	More information on request.
2	Micro switch with gold-plated contacts	≤ 30	--	≤ 0.4	(U x I = max. 0.12 VA)

Process Connection / Electrical Connection

Process connection	Electrical connection	Diaphragm
(M1) M12 x 1,5 male	(S1) Plug connector, 3-pin + E, EN 175301-803 C	KLK: () NBR
(G1) G1/4 male	(K2) Silicone cable 3 x 0.5 mm ² ; 600 mm long	KLM: (V) FKM
		KLM: (N) CR
		KLM: (E) EPDM

Options

EXI	for intrinsically safe application
HP (KLM only)	operating pressure up to 150 bar
IP69K (K2 only)	for Heavy Duty application

Order Code

Example for order number

Type	Type	Pressure range code	Process connection	Electr. connection	Micro switch	Diaphragm	Option
KLK	or KLM	025	G1	S1	2	V	EXI

Your order number

Type	Type	Pressure range code	Process connection	Electr. connection	Micro switch	Diaphragm	Option
KLK	or KLM						