

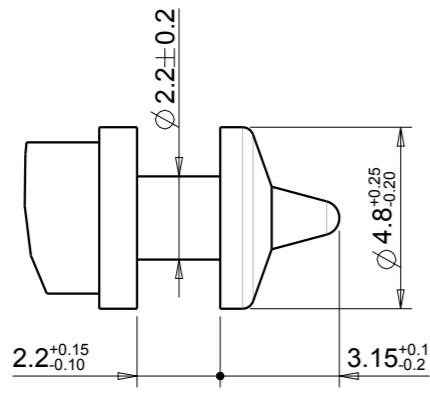
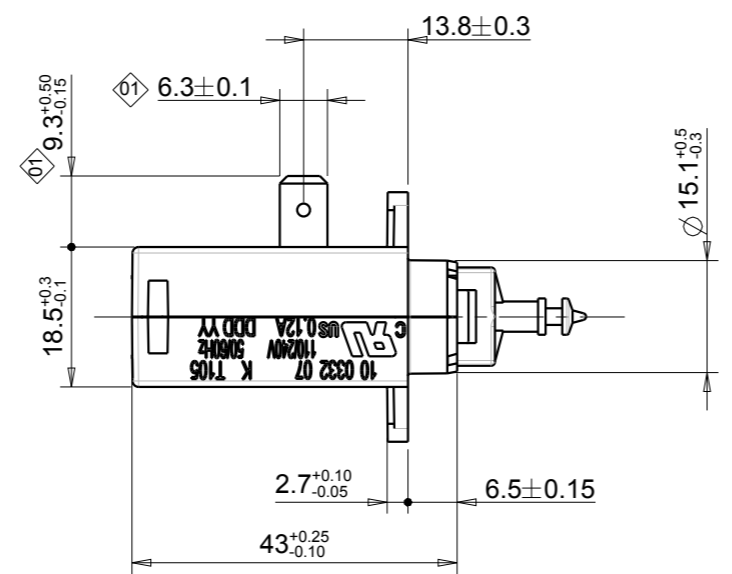


Il fornitore e' tenuto a richiedere le prescrizioni riguardanti la simbologia sulle dimensioni...  
 The supplier is obliged to request the prescription regarding symbols on the dimensions...  
 n. 83.0117.00. The symbol  $\diamond$  refers to modified area/dimensions.


Questo documento e le informazioni in esso contenute sono di proprieta' ELTEK SpA e devono considerarsi di natura riservata...  
 This document and the information in it contained are property of ELTEK SpA and, as such, they are to be considered reserved. Therefore, any reproduction in any form or by any means, without prior written permission of ELTEK SpA, is forbidden.

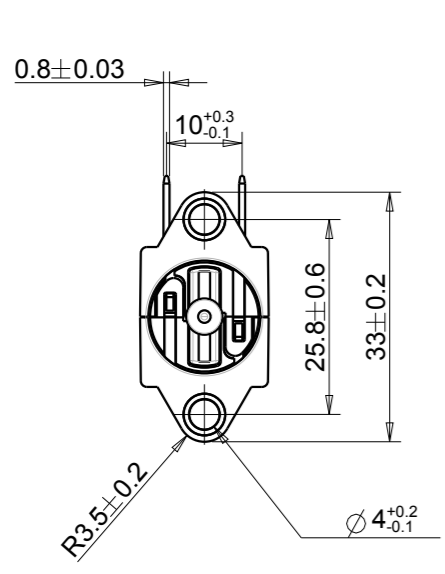


DETAIL A  
SCALE 5:1

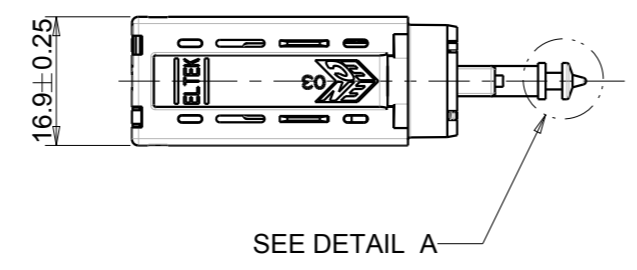



MARKING

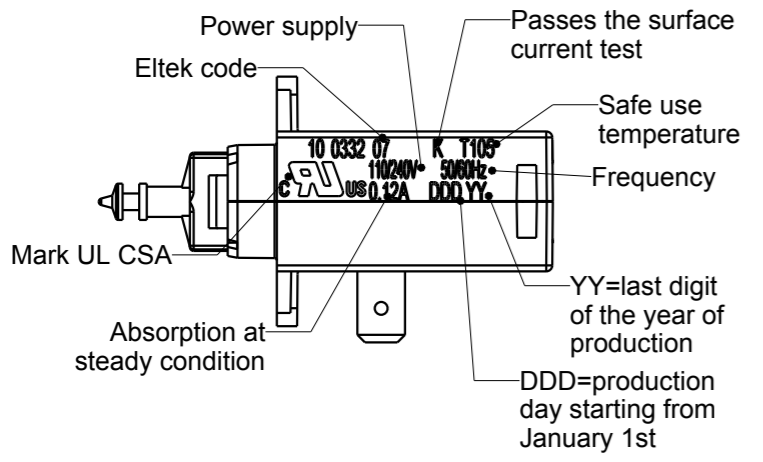

Electrical and mechanical features		
Pos.	Features	Value
1	Breakdown voltage (< 0.1 s)	400V
2	Absorbed current (peak 110/240V)	0.5A/1.50A
3	Absorbed current (steady state 110/240V)	0.05A/0.03A
4	Do not energize for more than	12 hours
5	Do not stop plunger travel greater than	18.5 mm
6	Max applicable load during phase OFF	2 N

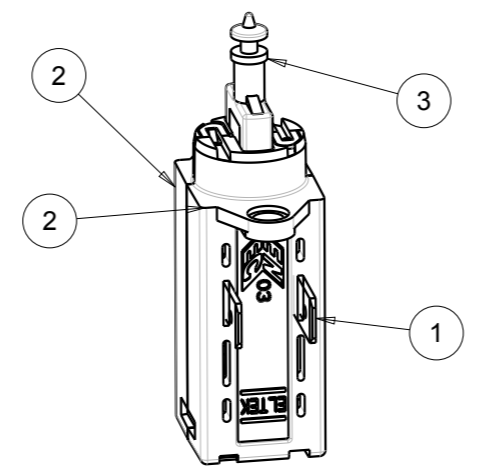

N°	Description	Materiale	QTY	Colour
1	Faston	Bronze	2	Bronze
2	Half housing	PA 6.6+Glass fiber	2	Brown
3	Plunger	PA 6.6+Glass fiber	1	Brown

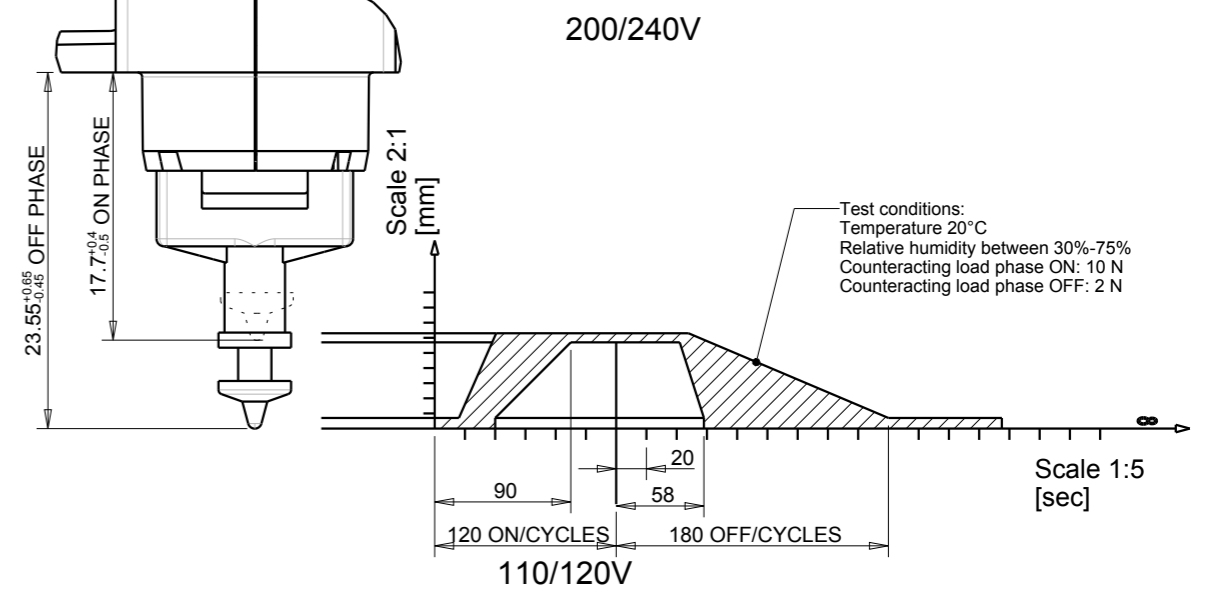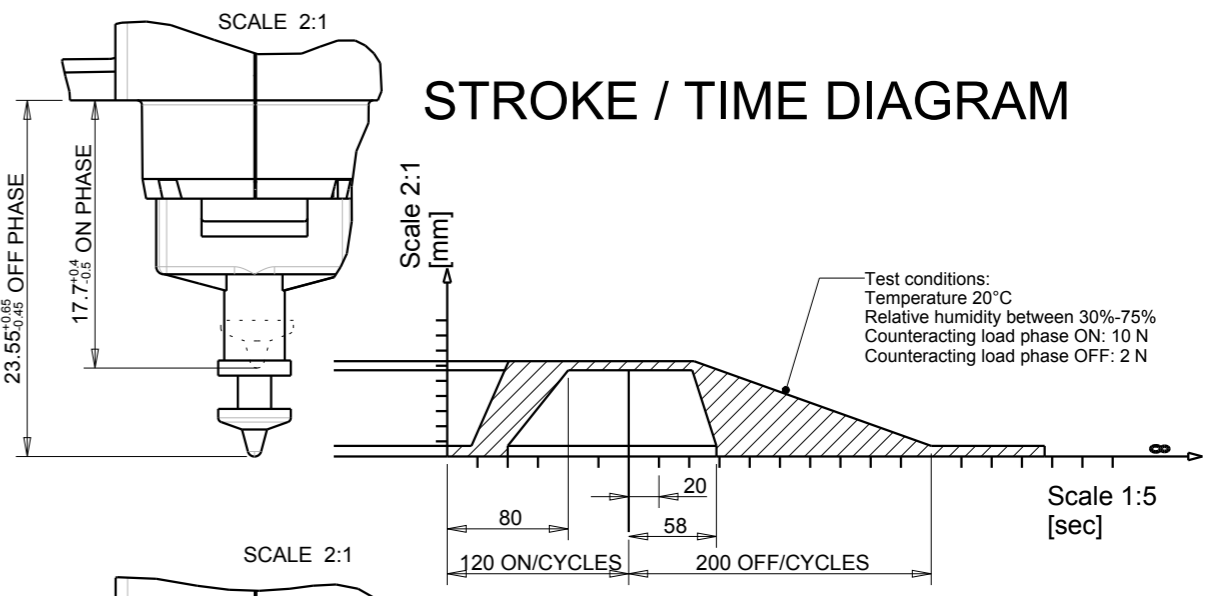

Note:  
 For technical data refer to the Technical Specification code 82.0332.00  
 The thermoactuator has a grade of protection : IP00 (not protected, ref. IEC 60529).  
 For more details refer to technical specification code 82.0332.00

All above p.n. are approved: File E113133  
 N°500 thermoactuator in each box (390X290X180)

01		Added dimensions: 9.3+0.5-0.15 and 6.3±0.1		26/03/19	SEGALINI	Drawn: SEGALINI Date: 12/03/19
Rev		Modification Description		Date	By	Checked: GAJ Date: 26/03/19
Drawing Size	First angle projection	Material		Scale: 1:1		
A3		Colour		Volume: 8153 [mm <sup>3</sup> ]		
		Description		Weight [g]: 19.5		
ELTEK S.p.A. - Casale Monf. ITALY		Thermoactuator 6 mm, pull type 110/240V		Replace 10.0332.BB.09 Code 10.0332.07.01		