




V250

Light weight crimping head for Cu-terminals 10 - 800 mm² and Al-terminals 16 - 630 mm²

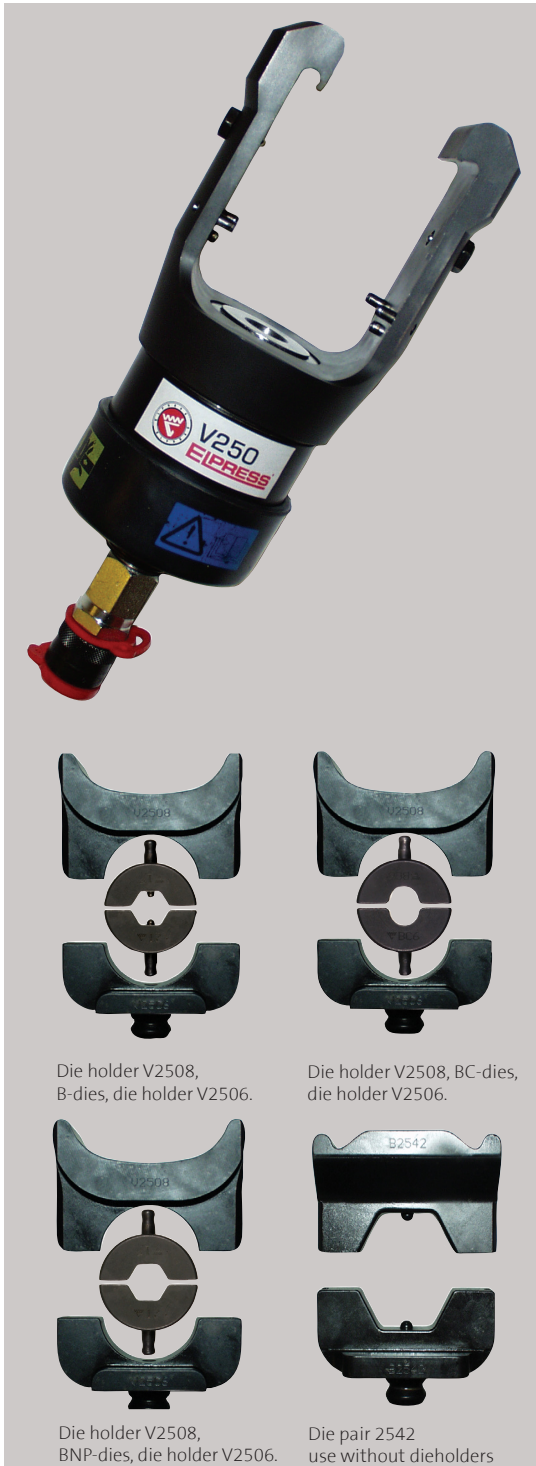

Die holder V2508,
B-dies, die holder V2506.

Die holder V2508, BC-dies,
die holder V2506.

Die holder V2508,
BNP-dies, die holder V2506.

Die pair 2542
use without dieholders

V250 crimp head is to be used together with foot-pump P4000 or pump PS710 (230VAC/24VDC).

Important characteristic:

- weight of only 4,6 kg
- 250 kN crimping force
- using same crimping dies (B-dies, matrix and punches) as in the 1300-system, 2500-system and 1400-system
- working pressure 63 Mpa (630 bar)
- with protection cap
- dimensions Ø111 mm x 280 mm
- crimping range of: Cu-terminals 10-800 mm²
Al-terminals 16-630 mm²
Cu branch connectors (C-sleeves) up to 300 mm²

Storage box LV250

Carry box which takes the tool V250 and all necessary accessories to crimp Elpress Cu terminals and through connectors

Particulars:

- steel reinforced plywood
- Polyethylen insert material
- the box can be used as storage or be taken to site
- sturdy, form cut inserts
- weight 5.2 kg, excl. accessories
- length 570 mm, width 467 mm, height 130 mm

