



Tipo : Type :	<b>F18</b>	do: 18 mm
------------------	------------	-----------

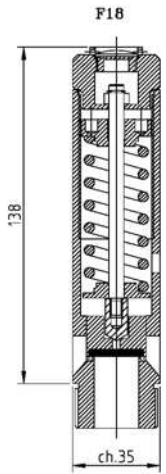

kg. 0,75

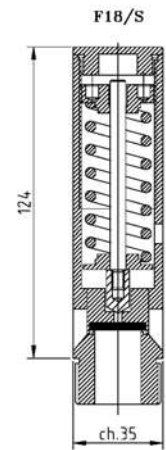

kg. 0,68

Omologazione <i>Homologation</i>	PN	Coefficiente efflusso ridotto <i>Low flow coefficient</i>	Campo di taratura <i>Setting range</i>
E.D. 97/23/EC IV <sup>^</sup> Cat.(PED)	40	0,74; >3 bar 0,84	0,3 - 21,0 bar
EAC	40	0,74; >3 bar 0,84	0,3 - 21,0 bar
ATEX Ex II 2 G c (1)	40	0,74; >3 bar 0,84	0,3 - 21,0 bar
ATEX Ex II 2 D c	/	/	/
ASME VIII Div.1	40	0,712	1,0 - 21,0 bar
Canadian Reg. CRN	40	0,712	1,0 - 21,0 bar

### CONFIGURAZIONE - CONFIGURATION

Materiale <i>Material</i>	Ottone <i>Brass</i>	Mista Ottone-Acciaio inox <i>Mixed Brass-Stainles steel</i>	Acciaio inox <i>Stainles steel</i>
<b>Modelli</b> <i>Model</i>	Con ghiera <i>With ring nut</i>	/	/
	Senza Ghiera <i>Without ring nut</i>	/	/
	Con protezione <i>With Protection</i>	/	/
	/	/	/
	/	/	/
<b>Sedi di Tenuta</b> <i>Seal System</i>	N.B.R. (Std) -10 / + 100 °C	/	/
	E.P.D.M. -50 / + 150 °C	/	/
	VITON -20 / +200 °C	/	/
	SILICONE -60 / +200 °C	/	/
	PTFE -196 / +250 °C	/	/
	KALREZ -20 / +250 °C	/	/
	/	/	/
<b>Connessione Entrata</b> <i>Inlet Connection</i>	G.1" ISO228	/	/
	R.1" EN10226	/	/
	1" NPT	/	/
	/	/	/
	/	/	/
<b>Connessione Uscita</b> <i>Outlet Connection</i>	/	/	/
	/	/	/
	/	/	/
	/	/	/
	/	/	/

A richiesta possono essere eseguiti collaudi dai più prestigiosi enti quali: INAIL (area ISPEL), TÜV, RINA, Bureau Veritas, ABS e Lloyd Register.

*On request tests can be made by the most prestigious societies, such as: INAIL (area ISPELS), TÜV, RINA, Bureau Veritas, ABS and Lloyd Register.*

**Note: (1) No Modello Con protezione / No Model With Protection**