

BRONZE GLOBE VALVE

Ref. **460/462**

Ref. : DS 460

Rev.

Date : 08/04



Valves and fittings

90 rue du ruisseau 38297 ST QUENTIN FALLAVIER
 Tel : (33)04.74.94.15.90 Fax : (33)04.74.95.62.08
 E.mail : sferaco@sferaco.fr

SPECIFICATIONS :

- . Female/female
- . Bronze

USE :

- . For common fluids of 2nd group
- . Max temperature Ts : 90°C
- . Max pressure Ps : 16 bars

RANGE :

- . Female/female with metal seat Ref. **460** 1/4" au 2"
- . Female/female with PTFE seat Ref. **462** 1/4" au 2"


MATERIALS :

DESIGNATION	MATERIALS
Body	Bronze
Bonnet	Laiton
Stem	Laiton
Seat 460	Laiton
Seat 462	PTFE
Packing	Graphite
Packing nut	Brass
Handwheel	Carbon steel

SIZE :




Ø	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4"	1" 1/2"	2"	
Ref.	L	45	45	49	55	63	72	89	100
460/462	H	66	66	67	78	90	100	125	145
	D	50	50	50	50	55	60	70	80
	E	9,5	9,5	11	12	12	15	15	19
	Weight	2	0,2	0,21	0,32	0,46	0,68	1,03	1,45

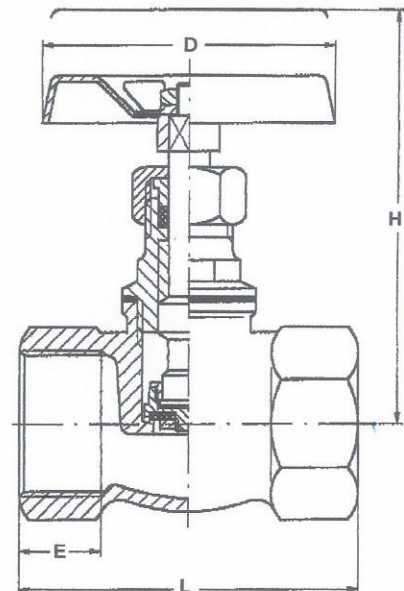

STANDARDS :

. DIRECTIVE 97/23/CE : CE N° 0497 Risk category III

HEAD LOSS

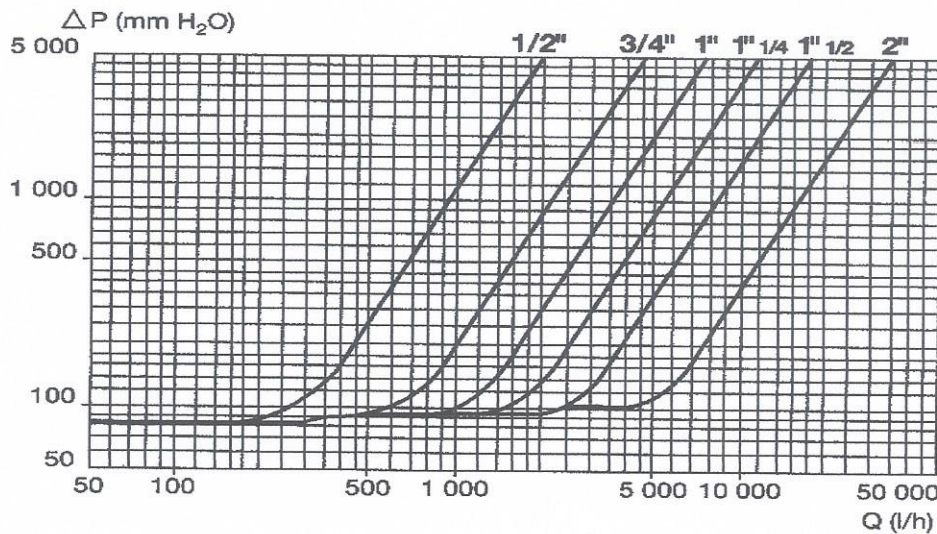

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.