

Electric screwdriver BN 500 series Article-no.: SKD-BN5xx-ESD




Product information

- L: lever start, P: push start, F: high-speed
- Screw counting function and soft start optionally available (SKP-BC40HL)
- Together with the soft start module KL-SSBN a model equipped with left-hand thread with soft start in the left-hand rotation is also available (CCW version)
- No ejection of carbon dust: so it is suitable for cleanroom workplaces



Technische Informationen:

Model/article no.	SKD-BN512L-ESD SKD-BN512P-ESD	SKD-BN519L-ESD SKD-BN519P-ESD	SKD-BN512LF-ESD SKD-BN512PF-ESD	SKD-BN517LF-ESD SKD-BN517PF-ESD
Voltage	DC 24V oder 32V			
Power	55W			
Torque	0.15 - 1.18 Nm	0.29 - 1.86 Nm	0.15 - 1.18 Nm	0.29 - 1.67 Nm
Accuracy	+/-3%			
Torque setting	stepless			
Idle speed HI	1000	1000	2000	2000
Idle speed LO	650	700	X	X
Screw size thread screw	1.6 - 3.0	2.3 - 3.5	1.6 - 3.0	1.0 - 1.7
Screw size self-tapping	1.6 - 2.6	2.3 - 3.0	1.6 - 2.6	1.6 - 3.0
Weight	520 g			
Length	245mm			
Power supply units & controllers	SKP-32BC-60W, SKP-BC40HL V3.0, SKP-BC40HL V3.1			
Bit type (standard type B)	A / B / C / D			

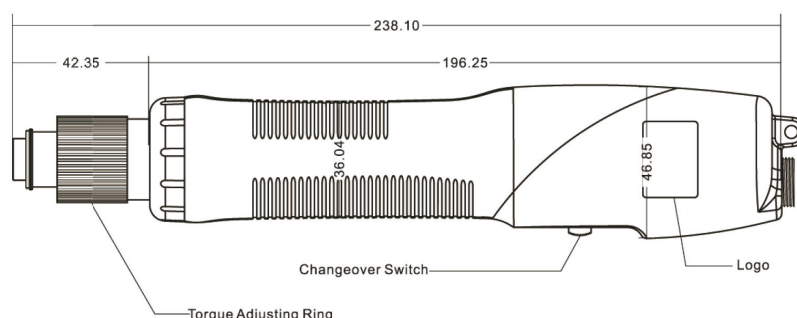

The information in this data sheet are intended as a guide. However, they are not a guarantee and do not absolve the consumer from their own tests. A legal obligation can not be derived. In all masses and weights technical tolerances according to DIN standards are possible.